

Fittings made from
unplasticized
poly(vinyl chloride)
(PVC-U), chlorinated
poly(vinyl chloride)
(PVC-C) or
acrylonitrile/butadiene/
styrene (ABS) with
plain sockets for pipes
under pressure —

Part 1: Metric series

ICS 23.040.45

National foreword

This British Standard reproduces verbatim ISO 727-1:2002 and implements it as the UK national standard.

The UK participation in its preparation was entrusted by Technical Committee PRI/88, Plastic Piping Systems to Subcommittee PRI/88/2, Pressure Piping Systems, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this subcommittee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international publications referred to in this document may be found in the BSI Standards Catalogue under the section entitled “International Standards Correspondence Index”, or by using the “Find” facility of the BSI Standards Electronic Catalogue.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, pages ii and iii, a blank page, pages 1 to 6, an inside back cover and a back cover.

The BSI copyright date displayed in this document indicates when the document was last issued.

This British Standard, having been prepared under the direction of the Sector Policy and Strategy Committee for Materials and Chemicals, was published under the authority of the Standards Policy and Strategy Committee on 3 July 2002

Amendments issued since publication

Amd. No.	Date	Comments

© BSI 3 July 2002

ISBN 0 580 39935 4

Fittings made from unplasticized poly(vinyl chloride) (PVC-U), chlorinated poly(vinyl chloride) (PVC-C) or acrylonitrile/butadiene/styrene (ABS) with plain sockets for pipes under pressure —

**Part 1:
Metric series**

Raccords en poly(chlorure de vinyle) non plastifié (PVC-U), en poly(chlorure de vinyle) chloré (PVC-C) ou en acrylonitrile/butadiène/styrène (ABS), à emboîtements lisses pour tubes sous pression —

Partie 1: Série métrique



Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO 727 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 727-1 was prepared by Technical Committee ISO/TC 138, *Plastics pipes, fittings and valves for the transport of fluids*, Subcommittee SC 2, *Plastics pipes and fittings for water supplies*.

Together with ISO 727-2, this first edition of ISO 727-1 cancels and replaces ISO 727:1985, which has been technically revised.

ISO 727 consists of the following parts, under the general title *Fittings made from unplasticized poly(vinyl chloride) (PVC-U), chlorinated poly(vinyl chloride) (PVC-C) or acrylonitrile/butadiene/styrene (ABS) with plain sockets for pipes under pressure*:

- Part 1: Metric series
- Part 2: Inch-based series

www.parsethylene-kish.com

Fittings made from unplasticized poly(vinyl chloride) (PVC-U), chlorinated poly(vinyl chloride) (PVC-C) or acrylonitrile/butadiene/styrene (ABS) with plain sockets for pipes under pressure —

Part 1: Metric series

1 Scope

This part of ISO 727 specifies the dimensions of plain sockets (cylindrical and conical) in fittings made from unplasticized poly(vinyl chloride) (PVC-U), chlorinated poly(vinyl chloride) (PVC-C) or acrylonitrile/butadiene/styrene (ABS), intended for connecting by solvent cementing to pipes of the corresponding material for use under pressure. The resulting joint does not require mechanical anchorage.

NOTE It is strongly recommended that the advice of the fittings manufacturer be sought in the selection of an appropriate type of solvent cement, depending upon whether the cylindrical or conical type of socketed fitting is being used for a particular installation.

2 Normative reference

The following normative document contains provisions which, through reference in this text, constitute provisions of this part of ISO 727. For dated references, subsequent amendments to, or revisions of, this publication do not apply. However, parties to agreements based on this part of ISO 727 are encouraged to investigate the possibility of applying the most recent edition of the normative document indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 161-1:1996, *Thermoplastics pipes for the conveyance of fluids — Nominal outside diameters and nominal pressures — Part 1: Metric series*

3 Terms and definitions

For the purposes of this part of ISO 727, the following terms and definitions apply.

3.1

cylindrical socket

plain socket having a generally cylindrical form with similar root and mouth dimensions

NOTE 1 In practice, such sockets are manufactured with a slight taper in order to assist in removing the moulded fitting from the moulding tool (see clause 6).

NOTE 2 The term parallel socket is used in some countries as a term equivalent to cylindrical socket.

3.2

conical socket

plain socket having a designed taper opening up from root to mouth, and having less clearance than a cylindrical socket

NOTE The term tapered socket is used in some countries as a term equivalent to conical socket.

3.3

mean inside diameter at mid-point of socket depth

d_{im}

arithmetic mean of two diameters measured at right angles to each other at the mid-point of the socket depth

4 Socket length

For cylindrical sockets, the minimum socket length L (see Figure 1) shall conform to Table 1. For conical sockets (see Figure 2), the minimum socket length L shall conform to Table 2.

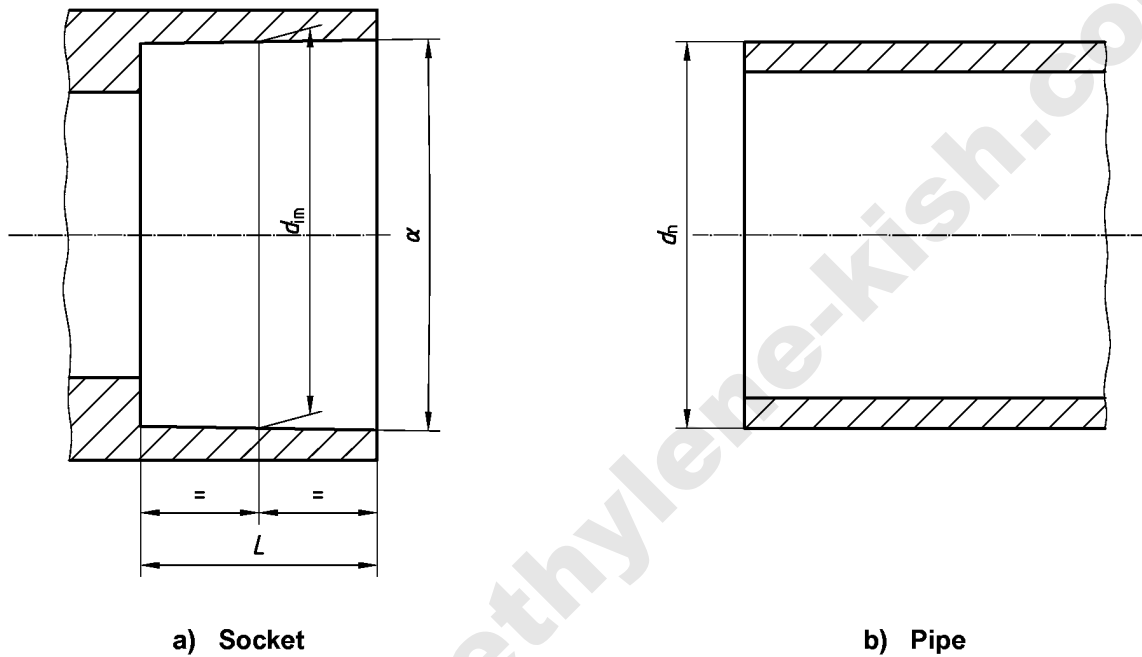


Figure 1 — Dimensions of cylindrical sockets

Table 1 — Dimensions of cylindrical sockets

Dimensions in millimetres

Nominal outside diameter d_n	Minimum socket length ^a L	Mean inside diameter at mid-point of socket depth		Out-of-roundness ^b max.
		min. d_{im}	max.	
10	12	10,1	10,3	0,25
12	12	12,1	12,3	0,25
16	14	16,1	16,3	0,25
20	16	20,1	20,3	0,25
25	18,5	25,1	25,3	0,25
32	22	32,1	32,3	0,25
40	26	40,1	40,3	0,25
50	31	50,1	50,3	0,3
63	37,5	63,1	63,3	0,4
75	43,5	75,1	75,3	0,5
90	51	90,1	90,3	0,6
110	61	110,1	110,4	0,7
125	68,5	125,1	125,4	0,8
140	76	140,2	140,5	0,9
160	86	160,2	160,5	1
180	96	180,2	180,6	1,1
200	106	200,2	200,6	1,2
225	118,5	225,3	225,7	1,4
250	131	250,3	250,8	1,5
280	146	280,3	280,9	1,7
315	163,5	315,4	316	1,9
355	183,5	355,5	356,2	2,2
400	206	400,5	401,5	2,4

^a The above-mentioned values for the minimum socket length related to cylindrical sockets made from PVC-U are calculated by the following equation: $L = 0,5d_n + 6$ mm, with a minimum socket length of 12 mm.

Due to the shrinkage behaviour of cylindrical sockets made from PVC-C and ABS, the socket lengths are calculated by the following equation: $L = 0,5d_n + 5$ mm.

^b The tolerances for the out-of-roundness are rounded values obtained from those in ISO 11922-1:1997, grade M, by multiplying by 0,25.

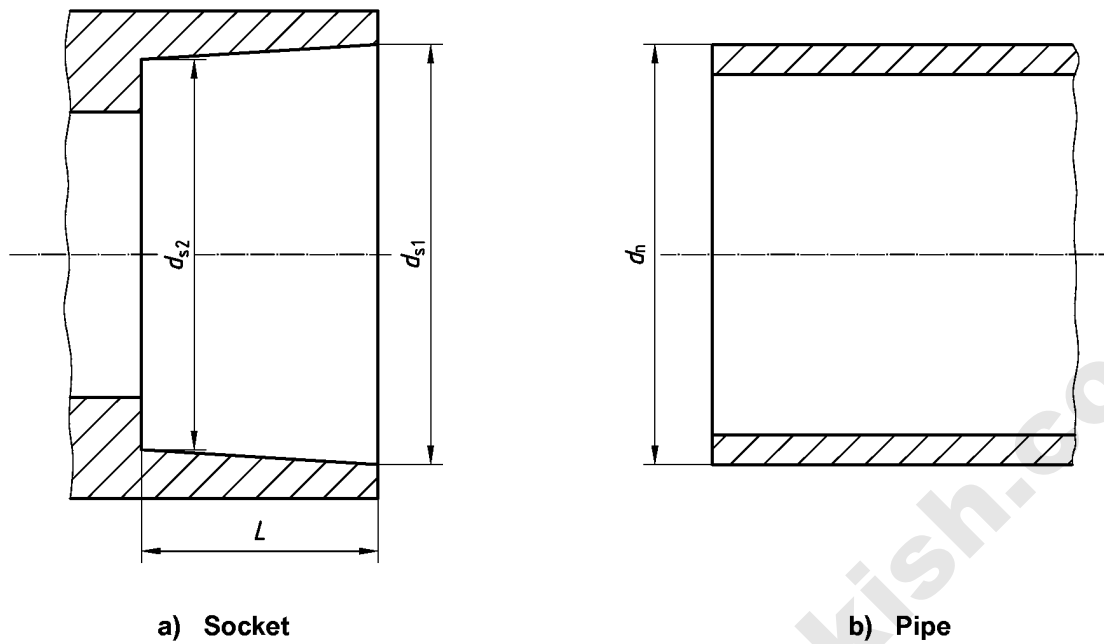


Figure 2 — Dimensions of conical sockets

Table 2 — Dimensions of conical sockets

Dimensions in millimetres

Nominal outside diameter d_n	Minimum socket length L	Mean inside diameter				Out-of-roundness max.
		Socket mouth d_{s1}		Socket root d_{s2}		
		min.	max.	min.	max.	
12	12	12,25	12,45	11,9	12,1	0,25
16	16	16,25	16,45	15,9	16,1	0,25
20	20	20,25	20,45	19,9	20,1	0,25
25	25	25,25	25,45	24,9	25,1	0,25
32	30	32,25	32,45	31,9	32,1	0,25
40	35	40,25	40,45	39,8	40,1	0,25
50	41	50,25	50,45	49,8	50,1	0,3
63	50	63,25	63,45	62,8	63,1	0,4
75	60	75,3	75,6	74,75	75,1	0,5
90	72	90,3	90,6	89,75	90,1	0,6
110	88	110,3	110,6	109,75	110,1	0,7

5 Socket inside diameter

The mean inside diameter of a socket shall be in accordance with the requirements of Table 1 for cylindrical sockets or Table 2 for conical sockets, and is based on the dimensions for thermoplastics pipes included in ISO 161-1.

6 Taper of cylindrical sockets

The maximum included angle α of the socketed portion of a fitting shall not exceed the following values:

$$d_n \leq 63 \text{ mm: } 0^\circ 40'$$

$$75 \text{ mm} \leq d_n \leq 315 \text{ mm: } 0^\circ 30'$$

$$355 \text{ mm} \leq d_n \leq 400 \text{ mm: } 0^\circ 15'$$

7 Marking

The identification of the different types of plain socket (cylindrical and conical) shall be reflected in the minimum required marking for the relevant product and shall be included in the corresponding product standard.

www.parsethylene-kish.com

Bibliography

- [1] ISO 11922-1:1997, *Thermoplastics pipes for the conveyance of fluids — Dimensions and tolerances — Part 1: Metric series*

www.parsethylene-kish.com

www.parsethylene-kish.com

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.
Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.
Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.
Email: copyright@bsi-global.com.