

Plastics — Ultra-high-molecular-weight polyethylene (PE-UHMW) moulding and extrusion materials —

Part 1: Designation system and basis for specifications

The European Standard EN ISO 11542-1:2001 has the status of a British Standard

ICS 83.080.20

National foreword

This British Standard is the official English language version of EN ISO 11542-1:2001. It is identical with ISO 11542-1:2001. It supersedes BS ISO 11542-1:1994 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee PRI/82, Thermoplastic materials, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

Cross-references

Attention is drawn to the fact that CEN and CENELEC Standards normally include an annexe which lists normative references to international publications with their corresponding European publications. The British Standards which implement these international or European publications may be found in the BSI Standards Catalogue under the section entitled "International Standards Correspondence Index", or by using the "Find" facility of the BSI Standards Electronic Catalogue.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the EN ISO title page, the EN ISO Foreword page, the ISO title page, pages ii and iii, a blank page, pages 1 to 7, the Annex ZA page, an inside back cover and a back cover.

The BSI copyright date displayed in this document indicates when the document was last issued.

Amendments issued since publication

Amd. No.	Date	Comments
13644 Incorporating Corrigendum No.1	24 January 2002	Corrected the EN ISO foreword and inserted the Annex ZA page.

This British Standard, having been prepared under the direction of the Sector Committee for Materials and Chemicals, was published under the authority of the Standards Committee and comes into effect on 15 July 2001

© BSI 24 January 2002

ISBN 0 580 37864 0

ICS 83.080.20

English version

Plastics - Ultra-high-molecular-weight polyethylene (PE-UHMW)
moulding and extrusion materials - Part 1: Designation system
and basis for specifications (ISO 11542-1:2001)

Plastiques - Matériaux à base de polyéthylène à très haute
masse moléculaire (PE-UHMW) pour moulage et extrusion
- Partie 1: Système de désignation et base de
spécifications (ISO 11542-1:2001)

This European Standard was approved by CEN on 15 February 2001.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Foreword

The text of the International Standard ISO 11542-1:2001 has been prepared by Technical Committee ISO/TC 61 "Plastics" in collaboration with Technical Committee CEN/TC 249 "Plastics", the secretariat of which is held by IBN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by August 2001, and conflicting national standards shall be withdrawn at the latest by August 2001.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

Endorsement notice

The text of the International Standard ISO 11542-1:2001 was approved by CEN as a European Standard without any modification.

NOTE: Normative references to International Standards are listed in annex ZA (normative).

INTERNATIONAL
STANDARD

ISO
11542-1

Second edition
2001-02-15

**Plastics — Ultra-high-molecular-weight
polyethylene (PE-UHMW) moulding
and extrusion materials —**

Part 1:
**Designation system and basis
for specifications**

*Plastiques — Matériaux à base de polyéthylène à très haute masse
moléculaire (PE-UHMW) pour moulage et extrusion —*

Partie 1: Système de désignation et base de spécifications

Reference number
ISO 11542-1:2001(E)

t

www.parsethylene-kish.com

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO 11542 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 11542-1 was prepared by Technical Committee ISO/TC 61, *Plastics*, Subcommittee SC 9, *Thermoplastic materials*.

This second edition cancels and replaces the first edition (ISO 11542-1:1994), which has been technically revised. The major change is that density has been replaced by Charpy notched impact strength as one of the designatory properties.

ISO 11542 consists of the following parts, under the general title *Plastics — Ultra-high-molecular-weight polyethylene (PE-UHMW) moulding and extrusion materials*:

- *Part 1: Designation system and basis for specifications*
- *Part 2: Preparation of test specimens and determination of properties*

www.parsethylene-kish.com

Plastics — Ultra-high-molecular-weight polyethylene (PE-UHMW) moulding and extrusion materials —

Part 1: Designation system and basis for specifications

1 Scope

1.1 This part of ISO 11542 establishes a system of designation for PE-UHMW thermoplastic materials which may be used as the basis for specifications.

For the purposes of this part of ISO 11542, PE-UHMW materials are polyethylene materials having a melt mass-flow rate (MFR), measured at 190 °C and 21,6 kg load, of less than 0,1 g/10 min.

1.2 The types of PE-UHMW are differentiated from each other by a classification system based on appropriate levels of the designatory properties

- a) viscosity number
- b) elongational stress
- c) Charpy notched impact strength

and on information about intended application and/or method of processing, important properties, additives, colorants, fillers and reinforcing materials.

1.3 This part of ISO 11542 is applicable to all PE-UHMW homopolymers and to ultra-high-molecular-weight copolymers of ethylene having a content of other 1-olefinic monomers of less than 50 % by mass and a content of non-olefinic monomers with functional groups up to a maximum of 3 % by mass.

It applies to materials ready for normal use in the form of powder, granules or pellets and to materials unmodified or modified by colorants, additives, fillers, etc.

1.4 It is not intended to imply that materials having the same designation give necessarily the same performance. This part of ISO 11542 does not provide engineering data, performance data or data on processing conditions which may be required to specify a material for a particular application and/or method of processing.

If such additional properties are required, they shall be determined in accordance with the test methods specified in part 2 of this International Standard, if suitable.

1.5 In order to specify a thermoplastic material for a particular application or to ensure reproducible processing, additional requirements may be given in data block 5 (see 3.1).

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO 11542. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 11542 are encouraged to investigate the

possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 1043-1:—¹⁾, *Plastics — Symbols and abbreviated terms — Part 1: Basic polymers and their special characteristics.*

ISO 1628-3:1991, *Plastics — Determination of viscosity number and limiting viscosity number — Part 3: Polyethylenes and polypropylenes.*

ISO 5834-1:1998, *Implants for surgery — Ultra-high molecular weight polyethylene — Part 1: Powder form.*

ISO 11542-2:1998, *Plastics — Ultra-high-molecular-weight polyethylene (PE-UHMW) moulding and extrusion materials — Part 2: Preparation of test specimens and determination of properties.*

3 Designation system

3.1 General

The designation system for thermoplastics is based on the following standardized pattern:

Designation						
Description block (optional)	Identity block					
	International Standard number block	Individual-item block				
		Data block 1	Data block 2	Data block 3	Data block 4	Data block 5

The designation consists of an optional description block, reading "Thermoplastics", and an identity block comprising the International Standard number and an individual-item block. For unambiguous coding, the individual-item block is subdivided into five data blocks comprising the following information:

- Data block 1: Identification of the plastic by its symbol PE-UHMW in accordance with ISO 1043-1 (see 3.2).
- Data block 2: Position 1: Intended application or method of processing (see 3.3).
Positions 2 to 8: Important properties, additives and supplementary information (see 3.3).
- Data block 3: Designatory properties (see 3.4).
- Data block 4: Fillers or reinforcing materials and their nominal content (see 3.5).
- Data block 5: For the purpose of specifications, a fifth data block may be added containing additional information (see 3.6).

The first character of the individual-item block shall be a hyphen. The data blocks shall be separated from each other by commas.

If a data block is not used, this shall be indicated by doubling the separation sign, i.e. by two commas (,,).

1) To be published. (Revision of ISO 1043-1:1997)

3.2 Data block 1

In this data block, after the hyphen, PE-UHMW plastics are identified by the symbol PE-UHMW, in accordance with ISO 1043-1.

3.3 Data block 2

In this data block, information about intended application and/or method of processing is given in position 1 and information about important properties, additives and colour in positions 2 to 8. The code-letters used are specified in Table 1.

If information is presented in positions 2 to 8 and no specific information is given in position 1, the letter X shall be inserted in position 1.

Table 1 — Code-letters used in data block 2

Code-letter	Position 1	Code-letter	Positions 2 to 8
		A	Processing stabilized
		C	Coloured
		D	Powder
E	Extrusion	E	Expandable
F	Extrusion of films	F	Special burning characteristics
G	General use	G	Granules
		H	Heat aging stabilized
		K	Metal deactivated
		L	Light or weather stabilized
M	Moulding		
		N	Natural (no colour added)
Q	Compression moulding		
		R	Mould release agent
S	Sintering	S	Lubricated
X	No indication	X	No indication
Y	Textile yarns, spinning	Y	Increased electrical conductivity
		Z	Antistatic

3.4 Data block 3

3.4.1 General

In this data block, the range of the viscosity number is represented by a single-figure code-number (see 3.4.2), the elongational stress by a single-figure code-number (see 3.4.3), and the Charpy notched impact strength by a single-figure code-number (see 3.4.4). The code-numbers are separated from each other by hyphens.

If a property value falls on or near a range limit, the manufacturer shall state which range will designate the material. If subsequent individual test values lie on, or either side of, the limit because of manufacturing tolerances, the designation is not affected.

NOTE Not all combinations of the values of the designatory properties may be possible for currently available polymers.

3.4.2 Viscosity number

The viscosity number shall be determined in accordance with ISO 1628-3, using a nitrogen atmosphere.

The possible values of viscosity number are divided into six ranges, each represented by a single-figure code-number, as specified in Table 2. Only materials with code-numbers 1 to 5 in Table 2 shall be used if the abrasion resistance of the material is important to the application.

Table 2 — Ranges of viscosity number in data block 3

Code-number	Range of viscosity number
0	$\leq 1\,710$
1	$> 1\,710$ but $\leq 2\,190$
2	$> 2\,190$ but $\leq 2\,700$
3	$> 2\,700$ but $\leq 3\,400$
4	$> 3\,400$ but $\leq 4\,100$
5	$> 4\,100$

3.4.3 Elongational stress

The elongational stress shall be determined in accordance with annex A of ISO 11542-2:1998.

The possible values of the elongational stress are divided into five ranges, each represented by a single-figure code-number as specified in Table 3.

Table 3 — Ranges of elongational stress in data block 3

Code-number	Range of elongational stress MPa
0	$\leq 0,1$
1	$> 0,1$ but $\leq 0,2$
2	$> 0,2$ but $\leq 0,3$
5	$> 0,3$ but $\leq 0,7$
7	$> 0,7$

3.4.4 Charpy notched impact strength

The Charpy notched impact strength shall be determined in accordance with annex B of ISO 11542-2:1998.

The possible values of the notched impact strength are divided into three ranges, each represented by a single-figure code-number as specified in Table 4.

Table 4 — Ranges of Charpy notched impact strength in data block 3

Code-number	Range of notched impact strength kJ/m ²
0	≤ 40
1	> 40 but ≤ 170
2	> 170

3.5 Data block 4

In this data block, the type of filler and/or reinforcing material is represented by a single code-letter in position 1, and the form is represented by a second code-letter in position 2, the code-letters being as specified in Table 5. Subsequently (without a space), the mass content may be given by a two-figure number in positions 3 and 4.

Table 5 — Code-letters for fillers and reinforcing materials in data block 4

Code-letter	Material	Code-letter	Form
B	Boron	B	Beads, spheres, balls
C	Carbon ^a		
		D	Powder
		F	Fibre
G	Glass	G	Ground
		H	Whiskers
K	Calcium carbonate		
M	Mineral ^{a, b} , metal ^a		
S	Synthetic organic ^a	S	Scales, flakes
T	Talc		
X	Not specified	X	Not specified
Z	Others ^a	Z	Others ^a

^a These materials may be further defined by their chemical symbol, for example, or additional symbols defined in the relevant International Standard. In the case of metals (M), it is essential to indicate the type of metal by means of its chemical symbol.

^b Mineral fillers should be designated more precisely if a symbol is available.

Mixtures of minerals and/or forms shall be indicated by combining the relevant codes using the sign "+" and placing the whole between parentheses. For example, a mixture of 25 % glass fibres (GF) and 10 % mineral powder (MD) would be indicated by (GF25+MD10).

3.6 Data block 5


Indication of additional requirements in this optional data block is a way of transforming the designation of a material into a specification for a particular application. This shall be done for example by reference to a suitable national standard or to a standard-like, generally established specification.

Only material with code-numbers 1 to 5 in Table 2 shall be used if the abrasion resistance of the material is important to the application.

4 Examples of designations

4.1 Designation only


An ultra-high-molecular-weight polyethylene (PE-UHMW) thermoplastic material, intended for compression moulding (Q), in the form of powder (D), with a viscosity number of 2400 ml/g (2), an elongational stress of 0,25 MPa (2) and a Charpy notched impact strength of 150 kJ/m² (1), would be designated:

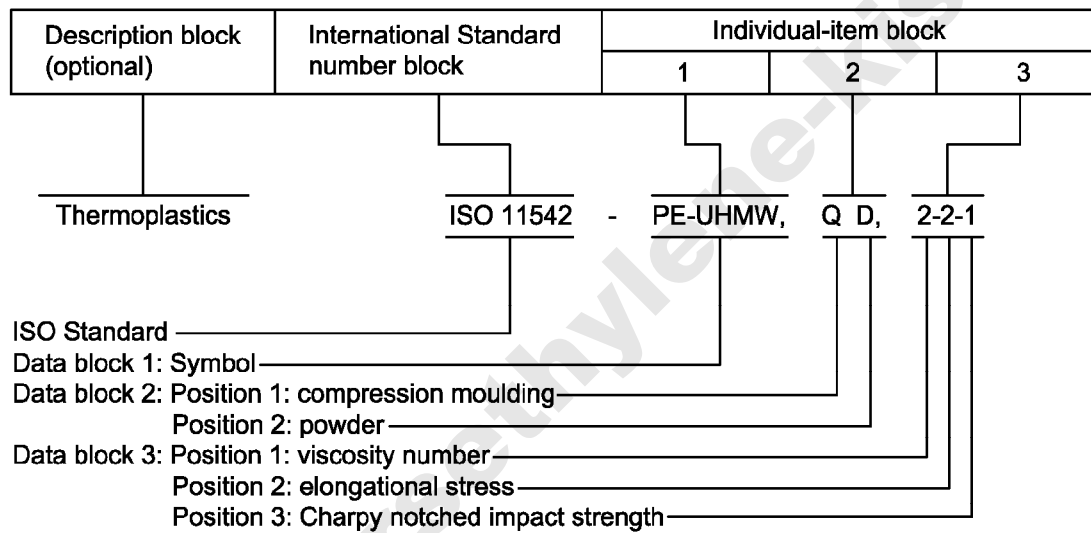


Designation: ISO 11542-PE-UHMW,QD,2-2-1

4.2 Designation transformed into a specification

An ultra-high-molecular-weight polyethylene (PE-UHMW) thermoplastic material, intended for compression moulding (Q), in the form of a powder (D), with a viscosity number of 2400 ml/g (2), an elongational stress of 0,25 MPa (2), and a Charpy notched impact strength of 150 kJ/m² (1), and intended for implants for surgery (ISO 5834-1), would be designated:

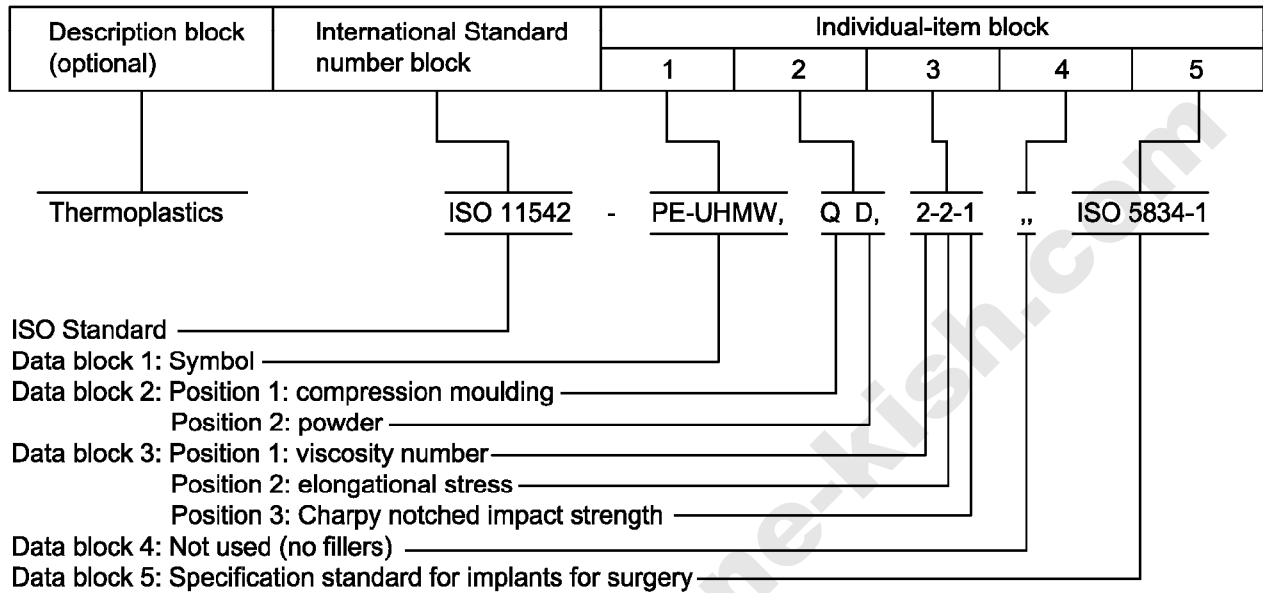

Designation: ISO 11542-PE-UHMW,QD,2-2-1,,ISO 5834-1

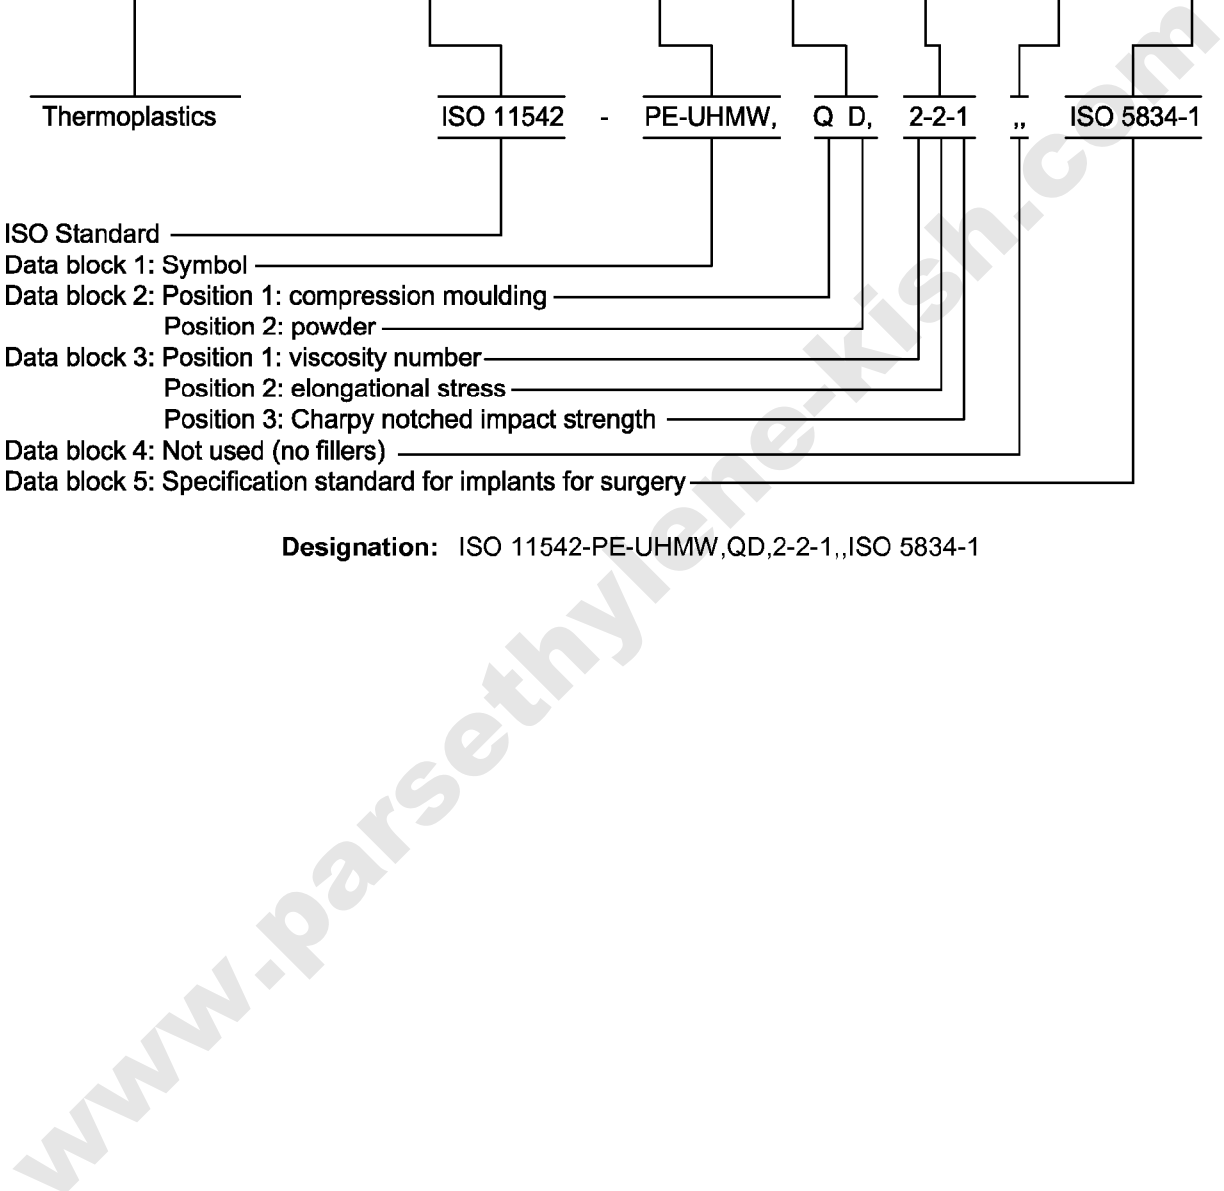

Annex ZA (normative)

**Normative references to international publications
with their relevant European publications**

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies (including amendments).

NOTE Where an International Publication has been modified by common modifications, indicated by (mod.), the relevant EN/HD applies.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN</u>	<u>Year</u>
ISO 1043-1	1997	Plastics — Symbols and abbreviated terms — Part 1: Basic polymers and their special characteristics	EN ISO 1043-1	1999
ISO 1628-3	1991	Plastics — Determination of viscosity number and of limiting viscosity number — Part 3: Polyethylenes and polypropylenes	EN ISO 1628-3	1999
ISO 11542-2	1998	Plastics — Ultra-high-molecular-weight polyethylene (PE-UHMW) moulding and extrusion materials — Part 2: Preparation of test specimens and determination of properties	EN ISO 11542-2	1999

www.parsethylene-kish.com

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001. Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre. Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001. Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager. Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553. Email: copyright@bsi-global.com.